

## PERFORMANCE EVALUATION FOR DARCY FRICTION FACTOR FORMULAE USING COLEBROOK-WHITE AS REFERENCE

**Oke<sup>1</sup>, Isaiah A. ; Ojo<sup>2</sup>, Stephen. O and Adeosun<sup>3</sup>, O. Olukayode**

<sup>1</sup> Civil Engineering Department, Obafemi Awolowo University, Ile-Ife, Nigeria

<sup>2</sup>Department of Computer Science Osun State College of Education, Ilesa, Nigeria

<sup>3</sup>Postgraduate Student in the Department of Civil Engineering, Obafemi Awolowo University, Ile-Ife, Nigeria

E-mail Addresses: okeia@oauife.edu.ng;; okeia@hotmail.com or okeiaa@yahoo.com

(Received: 12<sup>th</sup> August, 2014; Accepted 6<sup>th</sup> December, 2014)

### ABSTRACT

Estimation of Darcy friction factor and pipe network analysis are essential ingredients in the design and distribution of potable water. Common formulae for friction factors estimate include Colebrook-White, Moody, Swamee and Jain, Barr, Haaland, Tsal and Wood formulae. Accuracy of pipe network analysis depends on Darcy friction factor, but little is known on update of these formulae and their performance in developing countries. In this paper, as a follow up on our previous studies, Oke (2007); Babatola *et al.* (2008) an overview and performance evaluation of these formulae is presented using statistical methods (model of selection criterion and statistical errors). Darcy Friction factor formulae were obtained from archive. These formulae were used to estimate friction factors in pipes at various Reynolds number and relative roughness. Estimated friction factors were evaluated statistically using absolute error, total error, mean error and model of selection criterion using Colebrook-White friction factor as the reference friction factor. Colebrook-White was used as reference because it is widely recommended formulae and has a wide range of Reynolds number. The study revealed that friction factor in pipes varies with the formulae and varies from 0.0157 to 0.0727. In all cases Tsal formula has the smallest friction factors. Based on the mean error, accuracy were in order of Newton Raphson > Prandtl and Nikurdse > Zingrang and Sylvester > Serghide > Barr > Swamee and Jain > Eck > Haaland > Brkic > Wood > Moody > Chen (1979) > Buzzelli > Sonnad and Goudar > Vatankhah and Kouchakzadeh > Monzon *et al* > Churchill (1973)> Jain > Round > Manadilli > Evangleidis *et al*> Avci Kargoz > Tsal > Churchill (1977) > Chen (1985). It is concluded that Newton Raphson ; Prandtl and Nikurdse; Zingrang and Sylvester ; Serghide ; Barr; Swamee and Jain; Eck ; Haaland ; Brkic ; Wood and Moody are first choice friction formulae based on the values of model of selection criterion.

**Keywords:** Darcy Friction Factor, Pipe Flow, Statistical Methods, Darcy Friction Formulae.

### INTRODUCTION

Computation of flows, headloss and pressures in pipes have been of great value and interest for those involved in design, construction and maintenance of public water distribution systems. Many methods have been used in the past to compute flows, pressure and headloss in network of pipes. These methods range from graphical methods to the use of physical analogies and finally to the use of mathematical models (Lindell, 2006). Lindell (2006) gave the history of pipe network analysis and a summary of some of the more important methods as follows: Hardy Cross Method; The Simultaneous Node Method; The Simultaneous Loop Method; The Linear Method (Simultaneous Pipe Method) and The Gradient Method (Simultaneous Network Method). The most widely used method is the Hardy Cross method of balancing the heads at each of the junctions. It is an iteration procedure based on continuity as follows (Oke, 2007):

- The law of conservation of mass; and
- The pressures drop around any closed circuit is zero (France, 1993; Babatola *et al.*, 2008).

The procedure suggested by Hardy Cross requires that the flow in each pipe be initially estimated and the principle of continuity is satisfied at each junction. The head loss for each pipe in the network is determined from Hazen-Williams or Darcy-Weisbach (DW) equations. The most commonly used equation for obtaining the head loss in a pipe is the Darcy-Weisbach equation which is given by:

$$h_l = \frac{\lambda LV^2}{2gD} \text{ or } h_l = \frac{16\lambda LQ^2}{2g\pi^2 D^5} \quad (1)$$

Where;  $h_l$  is the head loss (m);  $\lambda$  is the friction factor (dimension less);  $L$  is the length of the pipe (m);  $D$  is the diameter of the pipe (m);  $V$  is mean velocity in the pipe ( $m s^{-1}$ ) ;  $g$  is acceleration due to gravity ( $m s^{-2}$ ) and  $Q$  is the discharge in the pipe

( $\text{m}^3 \text{s}^{-1}$ ).

The accuracy of the DW depends on the heads loss; friction in a steady uniform flow and the corresponding discharge in each pipe. A correction to the assumed flow is computed successively for each loop in the network until the correction is reduced to an acceptable magnitude. The correction for each the loop is given by the equation:

$$\Delta Q = \frac{-\sum h_i}{2\sum\left(\frac{h_i}{Q_i}\right)} \quad (2)$$

Where;  $\Delta Q$  is change in discharge in the pipe ( $\text{m}^3 \text{s}^{-1}$ ),  $Q_i$  is the discharge in the pipe ( $\text{m}^3 \text{s}^{-1}$ ) and  $h$  is as defined in equation 1.

The non-dimensional Darcy friction factor is a function of roughness coefficient ( $k$ ), diameter of the pipe, and Reynolds number ( $R_e$ ). Estimation of the Darcy friction factor is very important for the analysis of fluid mechanic behaviour in the pipes and open channels. The Darcy friction factor in turbulent flow of pipe depends on Reynolds number and relative roughness. There is an implicit relationship between Reynolds numbers and relative roughness

$$R_e = \frac{D}{v} V \quad (3)$$

Where;  $v$  is kinematics viscosity of the liquid;  $R_e$  is Reynolds number and  $D$  and  $V$  are as defined in equation 1.

For laminar flow, Darcy friction factor ( $\lambda$ ) is only dependent on the Reynolds number and is given by Moody, 1944 equation:

$$\lambda = \frac{64}{R_e} \quad (4)$$

But for the transitional region, is dependent on both Reynolds number and relative roughness. Darcy friction factor in a pipe can be computed by using implicit or explicit expressions (formulae) such as Colebrook-White's, Newton-Raphson, Moody, Wood, Barr and Haaland formulae. Colebrook-White (1937) and Colebrook (1939) expressions are given by (Mahendra, 2008; Mehran and Ayub, 2011) as:

$$\frac{1}{\sqrt{\lambda}} = -2 \log_{10} \left( \frac{k}{3.7D} + \frac{2.51}{R_e \sqrt{\lambda}} \right) \quad (5a)$$

$$\frac{1}{\sqrt{\lambda}} = 1.74 - 2 \log_{10} \left( 2 \frac{k}{D} + \frac{18.7}{R_e \sqrt{\lambda}} \right) \quad (5b)$$

Where;  $k$  is the effective roughness size of the pipe wall.

$$\frac{1}{\sqrt{\lambda}} = 1.14 - 2 \log_{10} \left( 1 + \frac{9.3}{R_e \frac{k}{D} \sqrt{\lambda}} \right) + 2 \log \left( \frac{D}{k} \right) \quad (5c)$$

The Newton-Raphson method, which provides fast convergence of  $\lambda$ , is defined by Featherstone and Nalluri, 1982 as:

$$f(\lambda) = \frac{1}{\sqrt{\lambda}} + 2 \log_{10} \left( \frac{k}{3.7D} + \frac{2.51 \pi D v}{4 Q \sqrt{\lambda}} \right) \quad (6)$$

The problem then reduces to finding the root of the function  $f(\lambda) = 0$ . The Newton-Raphson method requires a starting value ( $\lambda_0$ ), that is the initial guess for  $\lambda$  and a first better approximation is given by France, 1993 as:

$$\lambda_{n+1} = \lambda_n - \left( \frac{f(\lambda_n)}{f'(\lambda_n)} \right) \quad (7)$$

Where  $f'(\lambda_n)$  is the first order derivative of  $f(\lambda_n)$  at  $\lambda_n = 0$ .

Moody (1944; 1947) obtained directly without having to use a chart and proposed the expression for the range of  $4 \times 10^3 \leq R_e \leq 10^8$  and  $0 < k/D \leq 5 \times 10^{-2}$ . Moody expression is given by equation (8) (Moody, 1944; Babatola *et al.*, 2008).

$$\lambda = 0.0055 \left( 1 + \left[ 20000 \frac{k}{D} + \frac{10^6}{R_e} \right]^{\frac{1}{3}} \right) \quad (8)$$

Wood (1966) recommended the following expressions for frictional factor (France, 1993)

$$\lambda = a + b \text{Re}^{-c} \quad (9)$$

Where;  $a, b$  and  $c$  are Wood constants as follows:

$$a = 0.094 \left( \frac{k}{D} \right)^{0.225} + 0.53 \left( \frac{k}{D} \right) \quad (10)$$

$$b = 88.0 \left( \frac{k}{D} \right)^{0.44} \quad (11)$$

and

$$c = 1.62 \left( \frac{k}{D} \right)^{0.134} \quad (12)$$

Barr (1972; 1981) suggested an expression of the form:

$$\frac{1}{\sqrt{\lambda}} = -2 \log_{10} \left( \frac{k}{3.7D} + \frac{5.158 \log \left( \frac{R_e}{7} \right)}{R_e \left( 1 + \frac{R_e^{0.52}}{29} \frac{k}{D} \right)^{0.70}} \right) \quad (13)$$

In the last three decades, several explicit formulae have been suggested among which is Haaland (1983). Haaland suggested that:

$$\frac{1}{\sqrt{\lambda}} = -1.8 \log_{10} \left( \frac{6.9}{R_e} + \left( \frac{k}{3.7D} \right)^{1.11} \right) \quad (14)$$

The work by Prandtl and Nikuradse (1982) on smooth and artificially roughness pipes revealed equations (15 and 16) for smooth, turbulent and rough turbulent respectively.

$$\frac{1}{\sqrt{\lambda}} = 2 \log_{10} \left( \frac{R_e \sqrt{\lambda}}{2.51} \right) \quad (15)$$

$$\frac{1}{\sqrt{\lambda}} = 2 \log_{10} \left( \frac{3.7D}{k} \right) \quad (16)$$

The Swamee and Jain (1976) equation below is used to solve directly for the Darcy-Weisbach Darcy friction factor for a full-flowing circular pipe.

$$\lambda = \left[ \frac{0.25}{\left( \log_{10} \left( \frac{k}{3.7D} + \frac{5.74}{(R_e)^{0.9}} \right) \right)^2} \right] \text{ or}$$

$$\sqrt{\lambda} = -2 \log_{10} \left( \frac{k}{3.7D} + \frac{5.74}{(R_e)^{0.9}} \right) \quad (17)$$

Like Swamee and Jain equation; Serghide (1984), Tsal(1989), and Zigrang and Sylester(1982) equations are used to determine the Darcy-Weisbach Darcy friction factor for a full-flowing circular pipe. Serghide (1984), Tsal(1989) , and Zigrang and Sylester (1982) equations are as follows (Mahendra, 2008):

Serghide (1984):

$$\lambda = \left[ A - \frac{(B_s - A_s)^2}{(C_s - 2B_s + A_s)} \right]^{-2} \quad (18)$$

$$A_s = -2 \log_{10} \left( \frac{k}{3.7D} + \frac{12}{R_e} \right) \quad (18a)$$

$$B_s = -2 \log_{10} \left( \frac{k}{3.7D} + \frac{2.51A}{R_e} \right) \quad (18b)$$

$$C_s = -2 \log_{10} \left( \frac{k}{3.7D} + \frac{2.51B}{R_e} \right) \quad (18c)$$

Tsal(1989):

$$\lambda = 0.11 \left( \frac{k}{D} + \frac{68}{R_e} \right)^{0.25} \quad (19)$$

If  $\lambda < 0.018$  then  $\lambda = 0.85\lambda + 0.0028$

Zigrang and Sylester(1982):

$$\lambda = \left[ -2 \log_{10} \left( \frac{k}{3.77D} - \frac{5.02}{R_e} \left\{ \log_{10} \left( \frac{k}{3.77D} - \frac{5.02}{R_e} \left\{ \log_{10} \left( \frac{k}{3.77D} + \frac{13}{R_e} \right) \right\} \right) \right\} \right) \right]^2 \quad (20)$$

Ozger and Yildirim (2009a and b) stated that the other widely used explicit expressions for Darcy friction factor determination are Churchill (1973; 1977), Jain (1976), Chen (1979; 1985), Manadilli (1997), Romeo *et al.* (2002); Sonnad and Goudar (2004; 2006). Equations (21 to 27) present these explicit expressions respectively.

Churchill (1973):

$$\frac{1}{\sqrt{\lambda}} = -2 \left( \log_{10} \left( \left( \frac{k}{3.71D} \right) + \left( \frac{7}{(R_e)^{0.9}} \right) \right) \right) \quad (21)$$

Churchill (1977):

$$\lambda = 8 \left[ \left( \frac{8}{R_e} \right)^{12} + \frac{1}{(B_i + A_i)^3} \right]^{\frac{1}{12}} \quad (22)$$

$$A_i = \left( -2.457 \ln \left( \left( \frac{k}{3.7D} \right) + \left( \frac{7}{R_e} \right)^{0.9} \right) \right)^{16} \quad (22a)$$

$$B_i = \left( \frac{37530}{R_e} \right)^{16} \quad (22b)$$

Jain (1976):

$$\frac{1}{\sqrt{\lambda}} = -2 \left( \log_{10} \left( \left( \frac{k}{3.715D} \right) + \left( \frac{6.943}{R_e} \right)^{0.9} \right) \right) \quad (23)$$

Chen (1979):

$$\frac{1}{\sqrt{\lambda}} = -2 \left( \log_{10} \left( \left( \frac{k}{3.7065D} \right) - \left( \frac{5.0452}{R_e} \right) \log_{10} \left( \left( \frac{1}{2.8257} \right) \left( \frac{k}{D} \right)^{1.1098} + \left( \frac{5.8506}{(R_e)^{0.9981}} \right) \right) \right) \right) \quad (24a)$$

Chen (1985):

$$\frac{1}{\sqrt{\lambda}} = -2 \left( \log_{10} \left( \left( \frac{k}{3.7D} \right) - \left( \frac{95}{R_e^{0.983}} \right) - \left( \frac{96.82}{R_e} \right) \right) \right) \quad (24b)$$

Manadilli (1997):

$$\frac{1}{\sqrt{\lambda}} = -2 \left( \log_{10} \left( \left( \frac{k}{3.7D} \right) + \left( \frac{95}{(R_e)^{0.983}} \right) - \left( \frac{96.82}{R_e} \right) \right) \right) \quad (25)$$

Romeo *et al.* (2002):

$$\frac{1}{\sqrt{\lambda}} = -2 \left[ \begin{array}{l} \log_{10} \left( \left( \frac{k}{3.7065D} \right) - \left( \frac{5.0272}{R_e} \right) \right) \log_{10} \left( \frac{k}{3.827D} \right) - \left( \frac{4.567}{R_e} \right)^* \\ \log_{10} \left( \left( \frac{k}{7.7918D} \right)^{0.9924} - \right) \\ \log_{10} \left( \left( \frac{5.3326}{(208.815 + R_e)} \right)^{0.9345} \right) \end{array} \right] \quad (26)$$

Sonnad and Goudar (2004; 2006)

$$\begin{aligned} \frac{1}{\sqrt{\lambda}} &= 0.8686 \ln \left( \frac{0.4587 R_e}{s^{\frac{s}{s+1}}} \right) \text{ or} \\ \frac{1}{\sqrt{\lambda}} &= 0.8686 \ln \left( \frac{0.4587 R_e}{(s - 0.31)^{\frac{s}{s+1}}} \right) \quad (27) \end{aligned}$$

*s* = 0.1240  $R_e \left( \frac{k}{D} \right) + \ln(0.4587 R_e)$  (27a)  
 Other Darcy friction factor formulae are Eck (1973); Round (1980); Vatankhah and Kouchakzadeh (2008); Buzzelli(2008); Avci and Kargoz(2009); Evanleids *et al.* (2010), Brkic (2011; 2012), which can be expressed as follows (Wikipedia, 2014):  
 Eck (1973):

$$\frac{1}{\sqrt{\lambda}} = -2 \log \left( \left( \frac{k}{3.715D} \right) + \left( \frac{15}{R_e} \right) \right) \quad (28)$$

Round (1980):

$$\frac{1}{\sqrt{\lambda}} = 1.8 \log \left( \frac{R_e}{0.135 R_e \frac{k}{D} + 6.5} \right) \quad (29)$$

Vatankhah and Kouchakzadeh (2008):

$$\frac{1}{\sqrt{\lambda}} = 0.8686 \ln \left( \frac{0.4587 R_e}{(s - 0.31)^{\frac{s}{s+0.9633}}} \right) \quad (30)$$

$$s = 0.1240 R_e \left( \frac{k}{D} \right) + \ln(0.4587 R_e) \quad (30a)$$

Buzzelli (2008):

$$\frac{1}{\sqrt{\lambda}} = A_b - \left( \frac{A_b + 2 \log \left( \frac{B_b}{R_e} \right)}{1 + \frac{2.18}{B_b}} \right) \quad (31)$$

$$A_b = \left( \frac{0.744 \ln(R_e) - 1.41}{\left( 1 + 1.32 \sqrt{\frac{k}{D}} \right)} \right) \quad (31a)$$

$$B_b = \frac{k}{3.7D} R_e + 2.51 A_b \quad (31b)$$

Avci and Kargoz(2009):

$$\lambda = \left( \frac{64}{\left( \ln(R_e) - \ln \left( 1 + 0.001 R_e \frac{k}{D} \left( 1 + 10 \sqrt{\frac{k}{D}} \right) \right) \right)^{2.4}} \right) \quad (32)$$

Evanleids *et al.* (2010):

$$\lambda = \left( \frac{0.2479 - 0.0000947 (7 - \log R_e)^4}{\left( \log \left( \frac{k}{3.615D} + \frac{7.366}{R_e^{0.9142}} \right) \right)^2} \right) \quad (33)$$

Brkic (2011; 2012)

$$\frac{1}{\sqrt{\lambda}} = -2 \log \left( \left( \frac{k}{3.71D} \right) + \left( \frac{2.18 S_b}{R_e} \right) \right) \quad (34)$$

$$S_b = \ln \left( \left( \frac{R_e}{1.816 \ln \left( \frac{1.1 R_e}{\ln(1 + 1.1 R_e)} \right)} \right) \right) \quad (34a)$$

More on Darcy friction factor can be found in literature such as McKeon *et al.* (2004; 2005) ; Ozger and Yildrim (2009a and b); Yildrim (2009); Xiande *et al.* (2011); Samadiafrad (2012); Salmasi *et al.* (2012); Coban (2012); Cojbasica and Brikic (2013); Papaevangelou *et al.* (2010); Winning and Cole (2013); Wikipedia (2014). With the well known importance of Darcy frictional factors in the selection of pipe size, determination of flows and headloss in a pipe, as well as important ingredient in the design of potable water supply scheme, coupled with a lot of researches and publications on Darcy friction factors in pipe documentations on update of Darcy friction factor estimate are rare in literature in developing countries. With advancement in technology and development of high speed computer and internet there is the need to document update on Darcy friction factor estimate and provide performance evaluation of each of these Darcy

friction factor formulae. The main aim of this study is to provide update on Darcy friction factor estimate and performance evaluation of each of these Darcy friction factor formulae with a particular attention to accuracy using statistical techniques.

## MATERIALS AND METHOD

Darcy friction factor formulae for pipe flow problems were obtained from archives (Babatola *et al.*, 2008; Mahendra, 2008; France, 1993; Featherstone and Nalluri, 1982; Mehran and Ayub, 2011; Winning and Coole, 2013; Wikipedia, 2014). These equations were used to estimate Darcy friction factor with Reynold number of  $4 \times 10^3 \leq R_e \leq 10^8$  and relative roughness of  $5 \times 10^{-5} < k/D < 0.01$ . The results were evaluated statistically using total error, mean squared error; root squared error; model of selection (MSC); absolute error; mean error and root error with Colebrook White equation as the reference formula. Colebrook-White equation was used as the reference formulae because the formula is widely recommended as the formula to be used to estimate pipeline head loss (the roughness coefficient is a function of the surface roughness and independent of the size of the pipe or velocity of flow); it is applicable to a wide range of Reynolds number-from smooth to turbulent conditions and it provides slightly improved

prediction of the wave velocity in pipe and the maximum depth of flow along the pipe.

## RESULTS AND DISCUSSION

The results of the study were divided into two categories: estimated Darcy friction factors using other equations, and statistical evaluations

**Estimated Darcy Friction Factors Using Other Equations:** Tables 1 and 2 present values of estimated Darcy friction factors using all these Darcy friction factor formulae (techniques). From Table 1 the lowest Darcy friction factors at a fixed pipe diameter, Reynolds number and relative roughness came from Tsal. Colebrook-White equations, Haaland, Zigrang and Sylvester, Serghide, Swamee and Jain, Prandtl and Nikurdse, Moody and Newton Raphson equations gave moderate Darcy friction factors. The highest values of Darcy friction factor were obtained from Round, Wood and Barr equations. Figure 1 presents Moody chart. This indicates that the lower extreme equations (Darcy friction factor) should be avoided. From the figure (Figure 1) these Darcy friction factors can be grouped into two lower (painted red) and medium (painted blue) regions. This suggests that the two extreme equations (lowest and highest formulae) should be avoided.

Table 1: Estimated Darcy friction factor

Reynolds Number	k/D	Churchill (1973)	Jain (1979)	Round (1979)	Avcikargoz	Buzzelli	Sonnad and Goudar	Manadilii	Evangleidis et al.	Vafamkhah and Kouchakzadeh	Manzoni et al.	Colebrook-White	Newton-Raphson
4000	0.000010	0.04046	0.0405	0.0398	0.0406	0.0399	0.0398	0.0399	0.0400	0.0399	0.0399	0.0161	0.0157
4000	0.000910	0.0334	0.0333	0.0331	0.0334	0.0337	0.0330	0.0332	0.0331	0.0331	0.0331	0.0161	0.0157
9000	0.005910	0.0337	0.0337	0.0334	0.0334	0.0276	0.0334	0.0337	0.0335	0.0334	0.0334	0.0157	
59000	0.010910	0.0398	0.0398	0.0396	0.0398	0.0234	0.0396	0.0395	0.0398	0.0396	0.0396	0.0201	0.0200
159000	0.020910	0.0497	0.0497	0.0496	0.0497	0.0268	0.0497	0.0497	0.0498	0.0497	0.0497	0.0390	0.0391
209000	0.025910	0.0540	0.0540	0.0539	0.0540	0.0285	0.0540	0.0540	0.0541	0.0540	0.0540	0.0446	
259000	0.030910	0.0580	0.0580	0.0579	0.0580	0.0301	0.0580	0.0581	0.0581	0.0580	0.0580	0.0446	
309000	0.035910	0.0618	0.0618	0.0617	0.0618	0.0316	0.0618	0.0618	0.0619	0.0618	0.0618	0.0538	0.0539
359000	0.040910	0.0654	0.0654	0.0653	0.0654	0.0330	0.0654	0.0654	0.0655	0.0654	0.0654	0.0578	0.0579
999000	0.014100	0.0428	0.0428	0.0427	0.0428	0.0234	0.0428	0.0428	0.0428	0.0428	0.0428	0.0652	0.0653
1499000	0.019100	0.0478	0.0478	0.0478	0.0478	0.0256	0.0478	0.0478	0.0478	0.0478	0.0478	0.0367	
1999000	0.024100	0.0523	0.0523	0.0523	0.0523	0.0275	0.0523	0.0523	0.0524	0.0523	0.0523	0.0427	
2499000	0.029100	0.0564	0.0564	0.0564	0.0564	0.0292	0.0565	0.0565	0.0565	0.0565	0.0565	0.0477	0.0478
2999000	0.034100	0.0603	0.0603	0.0603	0.0603	0.0308	0.0604	0.0604	0.0605	0.0604	0.0604	0.0522	0.0523
3499000	0.039100	0.0640	0.0640	0.0640	0.0640	0.0323	0.0640	0.0640	0.0642	0.0640	0.0640	0.0564	0.0565
3999000	0.044100	0.0675	0.0675	0.0675	0.0675	0.0337	0.0676	0.0676	0.0677	0.0676	0.0676	0.0603	
4499000	0.049100	0.0709	0.0709	0.0709	0.0709	0.0351	0.0710	0.0710	0.0711	0.0710	0.0710	0.0639	0.0640
9999000	0.010419	0.0384	0.0384	0.0384	0.0384	0.0214	0.0384	0.0384	0.0384	0.0384	0.0384	0.0708	0.0710
10499000	0.010919	0.0390	0.0390	0.0390	0.0390	0.0216	0.0391	0.0391	0.0391	0.0391	0.0391	0.0377	0.0378
10999000	0.011419	0.0396	0.0396	0.0396	0.0396	0.0219	0.0397	0.0397	0.0397	0.0397	0.0397	0.0384	
11499000	0.011919	0.0402	0.0402	0.0402	0.0402	0.0222	0.0403	0.0403	0.0403	0.0403	0.0403	0.0390	0.0391
11999000	0.012419	0.0408	0.0408	0.0408	0.0408	0.0224	0.0408	0.0408	0.0409	0.0408	0.0408	0.0396	0.0397
12499000	0.012919	0.0414	0.0414	0.0414	0.0414	0.0227	0.0414	0.0414	0.0414	0.0414	0.0414	0.0403	
12999000	0.013419	0.0419	0.0419	0.0420	0.0419	0.0229	0.0420	0.0420	0.0420	0.0420	0.0420	0.0408	
13999000	0.014419	0.0430	0.0430	0.0430	0.0430	0.0234	0.0431	0.0431	0.0431	0.0431	0.0431	0.0419	0.0420
14499000	0.014919	0.0436	0.0436	0.0436	0.0436	0.0237	0.0436	0.0436	0.0436	0.0436	0.0436	0.0425	
14999000	0.015419	0.0441	0.0441	0.0441	0.0441	0.0239	0.0441	0.0441	0.0441	0.0441	0.0441	0.0430	0.0431
15999000	0.016419	0.0451	0.0451	0.0451	0.0451	0.0243	0.0452	0.0452	0.0452	0.0452	0.0452	0.0441	
16499000	0.016919	0.0456	0.0456	0.0456	0.0456	0.0246	0.0457	0.0457	0.0457	0.0457	0.0457	0.0446	
16999000	0.017419	0.0332	0.0332	0.0332	0.0332	0.0189	0.0333	0.0333	0.0332	0.0332	0.0333	0.0451	0.0452
66999000	0.011701	0.0400	0.0400	0.0400	0.0400	0.0220	0.0400	0.0400	0.0400	0.0400	0.0400	0.0456	0.0457
116999000	0.016701	0.0454	0.0454	0.0454	0.0454	0.0245	0.0454	0.0454	0.0454	0.0454	0.0454	0.0332	
166999000	0.021701	0.0501	0.0501	0.0502	0.0501	0.0265	0.0502	0.0502	0.0502	0.0502	0.0502	0.0399	0.0400
216999000	0.026701	0.0544	0.0544	0.0545	0.0545	0.0284	0.0545	0.0545	0.0545	0.0545	0.0545	0.0454	
266999000	0.031701	0.0584	0.0584	0.0585	0.0585	0.0300	0.0585	0.0585	0.0585	0.0585	0.0585	0.0502	
366999000	0.041701	0.0658	0.0658	0.0658	0.0658	0.0331	0.0659	0.0659	0.0658	0.0659	0.0659	0.0585	
416999000	0.046701	0.0692	0.0692	0.0693	0.0693	0.0344	0.0693	0.0693	0.0693	0.0693	0.0693	0.0622	
466999000	0.051701	0.0776	0.0776	0.0776	0.0776	0.0357	0.0777	0.0777	0.0776	0.0777	0.0777	0.0658	0.0659
516999000	0.005679	0.0315	0.0315	0.0316	0.0316	0.0182	0.0316	0.0316	0.0314	0.0316	0.0316	0.0693	
566999000	0.016179	0.0324	0.0324	0.0324	0.0324	0.0185	0.0324	0.0324	0.0322	0.0324	0.0324	0.0727	
716999000	0.007679	0.0347	0.0347	0.0347	0.0347	0.0196	0.0347	0.0347	0.0347	0.0347	0.0347	0.0332	
816999000	0.008679	0.0361	0.0361	0.0361	0.0361	0.0203	0.0362	0.0362	0.0359	0.0362	0.0362	0.0347	
866999000	0.009179	0.0368	0.0368	0.0368	0.0368	0.0206	0.0368	0.0368	0.0366	0.0368	0.0368	0.0355	

Table 1: Estimated Darcy friction factor

Reynolds Number	$k/D$	Moody	Wood	Barr	Prandtl and Nikuradse	Swamee and Jain	Sergiñde	Tsal'	Zigrang and Sylvester	Haaland	Bikic	Eck	Churchill	Chen (1985)
4000	0.008910	0.0402	0.0385	0.0401	0.0081	0.0405	0.0399	0.0069	0.0080	0.0400	0.0442	0.0425	0.0406	0.0399
9000	0.005910	0.0402	0.0385	0.0401	0.0081	0.0405	0.0399	0.0069	0.0080	0.0400	0.0442	0.0425	0.0411	0.0404
59000	0.010910	0.0323	0.0325	0.0322	0.0192	0.0323	0.0321	0.0043	0.0191	0.0325	0.0328	0.0324	0.0322	0.0322
159000	0.020910	0.0391	0.0402	0.0398	0.0390	0.0398	0.0396	0.0053	0.0388	0.0392	0.0400	0.0396	0.0398	0.0398
209000	0.025910	0.0433	0.0457	0.0446	0.0451	0.0449	0.0067	0.0443	0.0445	0.0445	0.0452	0.0450	0.0451	0.0451
259000	0.030910	0.0468	0.0506	0.0498	0.0495	0.0498	0.0497	0.0080	0.0491	0.0492	0.0498	0.0497	0.0498	0.0498
309000	0.035910	0.0498	0.0551	0.0541	0.0538	0.0541	0.0540	0.0092	0.0534	0.0535	0.0541	0.0540	0.0541	0.0541
359000	0.040910	0.0524	0.0594	0.0581	0.0579	0.0581	0.0580	0.0104	0.0574	0.0575	0.0581	0.0580	0.0581	0.0581
909000	0.014100	0.0570	0.0675	0.0655	0.0653	0.0655	0.0654	0.0125	0.0648	0.0648	0.0654	0.0653	0.0653	0.0653
1409000	0.019100	0.0367	0.0376	0.0368	0.0367	0.0368	0.0368	0.0045	0.0365	0.0365	0.0368	0.0368	0.0368	0.0368
1909000	0.024100	0.0416	0.0435	0.0428	0.0427	0.0428	0.0428	0.0061	0.0424	0.0424	0.0428	0.0427	0.0428	0.0428
2409000	0.029100	0.0454	0.0487	0.0478	0.0478	0.0478	0.0478	0.0075	0.0475	0.0475	0.0474	0.0478	0.0478	0.0478
2909000	0.034100	0.0486	0.0534	0.0523	0.0523	0.0523	0.0523	0.0087	0.0519	0.0518	0.0523	0.0523	0.0523	0.0523
3409000	0.039100	0.0514	0.0578	0.0565	0.0565	0.0565	0.0565	0.0099	0.0560	0.0560	0.0564	0.0564	0.0565	0.0565
3909000	0.044100	0.0539	0.0620	0.0604	0.0603	0.0604	0.0604	0.0111	0.0599	0.0598	0.0603	0.0603	0.0604	0.0604
4409000	0.049100	0.0562	0.0661	0.0640	0.0640	0.0640	0.0640	0.0121	0.0635	0.0635	0.0640	0.0640	0.0640	0.0640
9909000	0.010419	0.0602	0.0737	0.0710	0.0710	0.0710	0.0710	0.0142	0.0703	0.0703	0.0709	0.0709	0.0709	0.0709
10409000	0.010919	0.0376	0.0386	0.0378	0.0378	0.0378	0.0378	0.0048	0.0376	0.0375	0.0378	0.0378	0.0378	0.0378
10909000	0.011419	0.0381	0.0392	0.0384	0.0384	0.0384	0.0384	0.0049	0.0382	0.0381	0.0384	0.0384	0.0384	0.0384
11409000	0.011919	0.0386	0.0398	0.0391	0.0391	0.0391	0.0391	0.0051	0.0388	0.0387	0.0390	0.0390	0.0391	0.0391
11909000	0.012419	0.0391	0.0404	0.0397	0.0397	0.0397	0.0397	0.0053	0.0394	0.0393	0.0396	0.0396	0.0397	0.0397
12409000	0.012919	0.0396	0.0410	0.0403	0.0403	0.0403	0.0403	0.0054	0.0403	0.0400	0.0399	0.0402	0.0402	0.0403
12909000	0.013419	0.0401	0.0416	0.0409	0.0408	0.0409	0.0408	0.0056	0.0406	0.0406	0.0408	0.0408	0.0408	0.0408
13909000	0.014419	0.0410	0.0428	0.0420	0.0420	0.0420	0.0420	0.0059	0.0417	0.0417	0.0416	0.0419	0.0420	0.0420
14409000	0.014919	0.0414	0.0433	0.0425	0.0425	0.0425	0.0425	0.0060	0.0422	0.0421	0.0425	0.0425	0.0425	0.0425
14909000	0.015419	0.0418	0.0439	0.0431	0.0431	0.0431	0.0431	0.0062	0.0428	0.0427	0.0430	0.0431	0.0431	0.0431
15909000	0.016419	0.0427	0.0449	0.0441	0.0441	0.0441	0.0441	0.0064	0.0438	0.0437	0.0441	0.0441	0.0441	0.0441
16409000	0.016919	0.0431	0.0455	0.0447	0.0446	0.0447	0.0447	0.0066	0.0443	0.0442	0.0446	0.0446	0.0447	0.0447
16909000	0.016701	0.0344	0.0460	0.0452	0.0452	0.0452	0.0452	0.0067	0.0448	0.0448	0.0451	0.0451	0.0452	0.0452
266909000	0.011701	0.0438	0.0465	0.0457	0.0457	0.0457	0.0457	0.0069	0.0453	0.0453	0.0456	0.0456	0.0456	0.0456
116909000	0.016701	0.0336	0.0340	0.0333	0.0332	0.0333	0.0333	0.0037	0.0331	0.0329	0.0332	0.0332	0.0333	0.0333
166909000	0.021701	0.0394	0.0408	0.0400	0.0400	0.0400	0.0400	0.0053	0.0397	0.0396	0.0400	0.0400	0.0400	0.0400
216909000	0.026701	0.0437	0.0463	0.0454	0.0454	0.0454	0.0454	0.0054	0.0468	0.0468	0.0471	0.0471	0.0471	0.0471
266909000	0.031701	0.0471	0.0512	0.0502	0.0502	0.0502	0.0502	0.0052	0.0498	0.0498	0.0497	0.0501	0.0501	0.0502
316909000	0.036701	0.0501	0.0558	0.0545	0.0545	0.0545	0.0545	0.0054	0.0541	0.0541	0.0544	0.0544	0.0545	0.0545
366909000	0.041701	0.0527	0.0600	0.0585	0.0585	0.0585	0.0585	0.0105	0.0580	0.0580	0.0584	0.0584	0.0585	0.0585
416909000	0.046701	0.0551	0.0641	0.0623	0.0623	0.0623	0.0623	0.0116	0.0618	0.0617	0.0622	0.0622	0.0623	0.0623
466909000	0.051701	0.0573	0.0681	0.0659	0.0659	0.0659	0.0659	0.0127	0.0653	0.0653	0.0658	0.0658	0.0659	0.0659
516909000	0.056701	0.0593	0.0719	0.0693	0.0693	0.0693	0.0693	0.0137	0.0687	0.0687	0.0692	0.0692	0.0693	0.0693
566909000	0.061701	0.0611	0.0757	0.0727	0.0727	0.0727	0.0727	0.0147	0.0720	0.0720	0.0726	0.0726	0.0727	0.0727
716909000	0.007679	0.0336	0.0340	0.0332	0.0332	0.0332	0.0332	0.0036	0.0330	0.0330	0.0332	0.0332	0.0332	0.0332
816909000	0.008679	0.0350	0.0355	0.0347	0.0347	0.0347	0.0347	0.0040	0.0345	0.0345	0.0347	0.0347	0.0347	0.0347
866909000	0.009179	0.0356	0.0362	0.0355	0.0355	0.0355	0.0355	0.0042	0.0352	0.0352	0.0354	0.0354	0.0355	0.0355

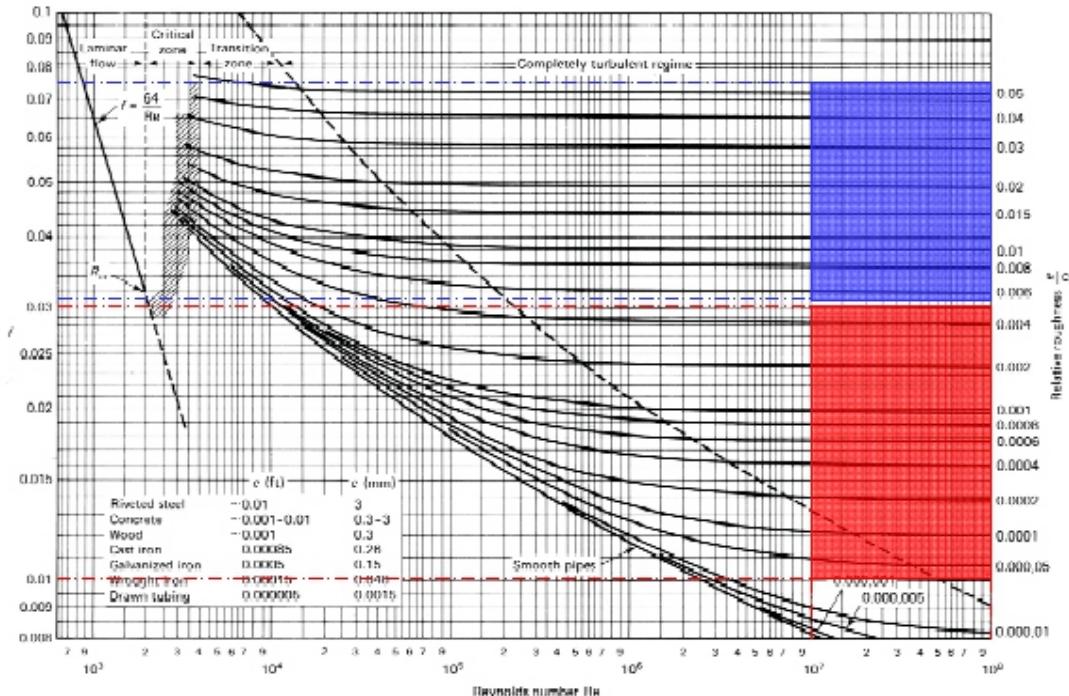


Figure 1: Moody Chart for Darcy Friction Factor Estimate (Source: Moody, 1944; Babatola *et al.*, 2008)

**Statistical Evaluations:** The model of selection criterion (MSC) is interpreted as the proportion of expected data variation that can be explained by the obtained data. It is well known that the higher the value of MSC, the higher is the accuracy, validity and the good fitness of the method. MSC can be computed using equation (35) (Oke, 2007) as follows :

$$MSC = \ln \frac{\sum_{i=1}^n (\bar{Y}_{obsi} - \bar{Y}_{obs})^2}{\sum_{i=1}^n (Y_{obsi} - Y_{cali})^2} - \frac{2p}{n} \quad (35)$$

Where; MSC is the model of selection criterion; n is the number of samples; p is the number of parameters for MSC;  $\bar{Y}_{obs}$  is the mean calculated Darcy friction factor for the Colebrook-White model;  $Y_{cali}$  is the calculated Darcy friction factor for the models and  $Y_{obsi}$  is the calculated Darcy friction factor for the Colebrook-White model

Table 2 presents the values of MSC for these equations. The MSC values are 9.598; 0.452; 1.831; 1.662; 4.381; 1.630; 1.683; -5.050; 4.325; 1.668; -0.42; -0.040; -0.025; -0.042; -2.946; -0.025; -0.022; -0.023; -0.029; -0.024; -0.024; 1.312; 1.476; -0.036 and -0.025 for Newton Raphson, Moody, Wood,

Barr, Prandtl and Nikurdse, Swamee and Jain , Serghide, Tsal, Zigrang and Sylvester, Haaland; Churchill (1979); Jain; Chen (1983); Round; AvciKargoz; Buzzelli; Sonnad and Goudar; Manadilli; Evangleids *et al.*; Vatankhah and Kouchakzadeh; Monzon *et al.*; Brkic; Eck; Churchill (1977) and Chen (1985) respectively. These MSC values revealed that Darcy friction factor formulae can be grouped into three. Formulae with friction factor lower than Colebrook –White (MSC value less than zero), formulae with friction factor higher than Colebrook –White (MSC value greater than 1.5) and formulae with friction factor closer to Colebrook –White (MSC value greater than zero but less than 1.5).

**Total Error:** The lower the value of total error, the higher is the accuracy, validity and good fitness of the method. Total error ( $Err^2$ ) can be computed using equation (36):

$$Err^2 = \sum_{i=1}^n (Y_{obsi} - Y_{cali})^2 \quad (36)$$

Where;  $Err^2$  is total error ;  $Y_{obsi}$  is observed value using Colebrook–White and  $Y_{cali}$  is calculated value using formular. Table 2 presents the values of total error for these equations.

**Absolute Error:** The lower the value of absolute error the higher is the accuracy, validity and good fitness of the method. Absolute error (AbErr) can be computed using equation (37):

$$AbErr = \sum_{i=1}^n |(Y_{obsi} - Y_{cali})| \quad (37)$$

Where; AbErr is absolute error. Table 2 presents the values of absolute error for these equations.

**Mean Error:** The lower the value of mean error the higher is the accuracy, validity and good fitness of the method. Mean error (MnErr) can be computed using equation (38):

$$MnErr = \frac{\sum_{i=1}^n |(Y_{obsi} - Y_{cali})|}{n} \quad (38)$$

**Table 2: Statistical Evaluation of Darcy Friction Factor Formulae**

Darcy friction factor formulae	Model of selection criterion	Total error	Mean Squared error	Root squared error	Absolute error	Mean error	Root error
Churchill	-0.042	0.007	0.000	0.082	0.210	0.004	0.458
Jain	-0.040	0.007	0.000	0.082	0.210	0.004	0.458
Chen	-0.025	0.007	0.000	0.081	0.208	0.004	0.456
Round	-0.042	0.007	0.000	0.082	0.210	0.004	0.458
Avci Kargoz	-2.946	0.033	0.001	0.180	1.228	0.022	1.108
Buzzelli	-0.025	0.007	0.000	0.081	0.209	0.004	0.457
Sonnad and Goudar	-0.022	0.007	0.000	0.081	0.209	0.004	0.457
Manadilli	-0.023	0.007	0.000	0.081	0.211	0.004	0.459
Evangleidis et al	-0.029	0.007	0.000	0.081	0.211	0.004	0.459
Vatankhah and Kouchakzadeh	-0.024	0.007	0.000	0.081	0.209	0.004	0.457
Monzon et al	-0.024	0.007	0.000	0.081	0.209	0.004	0.457
Newton - Raphson	9.598	0.000	0.000	0.001	0.005	0.000	0.068
Moody	0.452	0.002	0.000	0.048	0.207	0.004	0.454
Wood	1.831	0.001	0.000	0.035	0.122	0.002	0.349
Barr	1.662	0.001	0.000	0.037	0.069	0.001	0.264
Prandtl and Nikurdse	4.381	0.000	0.000	0.011	0.021	0.000	0.144
Swamee and Jain	1.630	0.001	0.000	0.037	0.070	0.001	0.265
Serghide	1.683	0.001	0.000	0.036	0.067	0.001	0.260
Tsal	-5.050	0.084	0.002	0.289	2.050	0.038	1.432
Zigrang and Sylvester	4.325	0.000	0.000	0.012	0.031	0.001	0.175
Haaland	1.668	0.001	0.000	0.036	0.078	0.001	0.279
Brkic	1.312	0.002	0.000	0.043	0.079	0.001	0.281
Eck	1.476	0.002	0.000	0.040	0.071	0.001	0.267
Churchill (1977)	-0.036	0.002	0.009	0.000	0.045	0.256	0.005
Chen (1985)	-0.025	0.002	0.009	0.000	0.045	0.256	0.005

Where; MnErr is mean error. Table 2 presents the values of error for these equations.

**Root Squared Error:** The lower the value of root squared error the higher the accuracy, validity and good fitness of the method. Root squared error (RsErr) can be computed using equation (39):

$$RsErr = \sqrt{\sum_{i=1}^n (Y_{obsi} - Y_{cali})^2} \quad (39)$$

Where; RsErr is root squared error. Table 2 presents the values of error for these equations.

**Root Absolute Error:** The lower the value of root absolute error the higher the accuracy, validity and good fitness of the method. Root absolute error (RabErr) can be computed using equation (40):

$$RabErr = \sqrt{\sum_{i=1}^n |(Y_{obsi} - Y_{cali})|} \quad (40)$$

Where; RabErr is root squared error. Table 2 presents the values of error for these equations.

**Mean Squared Error:** The lower the value of mean squared error the higher the accuracy, validity and good fitness of the method. Mean squared error ( $MnErr^2$ ) can be computed using equation (41):

$$MnErr^2 = \frac{\sum_{i=1}^n (Y_{obsi} - Y_{cali})^2}{N} \quad (41)$$

Where;  $MnErr^2$  is mean squared error. Table 2 presents the values of error for these equations.

Based on the values of these errors Newton Raphson > Prandtl and Nikurdse > Zingrang and Sylvester > Serghide > Barr > Swamee and Jain > Eck > Haaland > Brkic > Wood > Moody > Chen (1979) > Buzzelli > Sonnad and Goudar > Vatankhah and Kouchakzadeh > Monzon et al. > Churchill > Jain > Round > Manadilli > Evangleidis et al. > Avci Kargoz > Tsal > Churchill (1977) > Chen (1985).

(Where; > is stands for greater than)

## CONCLUSION

The study provides an update on Darcy friction

factor and their performance evaluation. The study revealed that there are 25 Darcy friction factor formulae which depend on Reynolds number and relative roughness. It can be concluded that accuracy of the formulae are in order of:

i. Newton Raphson > Prandtl and Nikurdse > Zingrang and Sylvester > Wood > Serghide > Haaland > Barr > Swamee and Jain > Eck > Brkic > Moody > Sonnad and Goudar > Manadilli > Monzon et al. > Vatankhah and Kouchakzadeh > Chen (1985) based the value model of selection criterion;

ii. Newton Raphson > Prandtl and Nikurdse > Zingrang and Sylvester > Serghide > Barr > Swamee and Jain > Eck > Haaland > Brkic > Wood > Moody > Chen (1979) > Buzzelli > Sonnad and Goudar > Vatankhah and Kouchakzadeh > Monzon et al. > Churchill > Jain > Round > Manadilli > Evangleidis et al. > Avci Kargoz > Tsal > Churchill (1977) > Chen (1985) based on mean error; and

iii. Although, it might be argued that computation of friction factors using these higher accuracy formulae might be difficult, but availability of high speed computer and other devices have made it easier.

## REFERENCES

- Avci, A. and Karagoz, I. 2009. A novel explicit equation for friction factor in smooth and rough pipes. *J. Fluids Eng.* 131(6): 61203, 1-4
- Babatola, J.O; Oguntuase, A.M; Oke, I. A and Ogedengbe, M.O. 2008 . An Evaluation of Frictional Factors in Pipe Network Analysis Using Statistical Methods. *Environmental Engineering and Sciences* 25 (4): 539-548
- Barr, D.I.H. 1972. New forms of equations for the correlation of pipe resistance data. *Proc Inst Civil Eng, Tech Note* 72(53):383–390.
- Barr, D.I.H. 1981. Solutions of the Colebrook-White function for resistance to uniform turbulent flow. *Proc Inst Civil Eng.* 2 (71):529 - 537.
- Brkić, D., 2011. Review of explicit

- approximations to the Colebrook relation for flow friction. *Journal of Petroleum Science and Engineering* 77: 34-48.
- Brkić, D. 2012. Can pipes be actually really that smooth?. *International Journal of Refrigeration* 35 (2): 209-215.
- Buzzelli, D. 2008. Calculating friction in one step. *Machine Design* 80 (12): 54-55.
- Chen, J.J. 1985. Systematic explicit solutions of Prandtl and Colebrook–White equations for pipe flow. *Proc Inst Civil Eng 2, Tech Note* 431(79):383–389.
- Chen, N.H. 1979. An explicit equation for friction factor in pipe. *Ind Eng Chem Fundam* 18(3):296 - 304.
- Churchill, S.W. 1977. Friction factor equation spans all fluid-flow regimes. *Chem Eng* 84(24):91–92.
- Churchill, S.W. 1973. Empirical expressions for the shear stressing turbulent flow in commercial pipe. *AICHE Journal* 19(2):375–376.
- Çoban, M.T. 2012. Error analysis of non-iterative Friction factor formulas relative to Colebrook-White equation For the calculation of pressure Drop in pipes. *Journal of Naval Science and Engineering* 8(1),1-13
- Ćojašića, Ž. and Brkić, D. 2013. Very accurate explicit approximations for calculation of the Colebrook friction factor. *International Journal of Mechanical Sciences* 67: 10-13
- Colebrook, C. F. 1939. Turbulent flow in pipes, with particular reference to the transition region between the smooth and rough pipe laws. *J Inst Civil Eng* 11:133–156.
- Colebrook, C.F., and White C.M. 1937. Experiments with fluid friction in roughened pipes. *Proc R Soc A Mat*.161 (904):367–381.
- Eck, B.1973. Technische Stromungslehre; Springer: New York.
- Evangelides, C ; Papaevangelou, G. and Tzimopoulos, C. 2010. A New Explicit Relation for the Friction Factor Coefficient in the Darcy–Weisbach Equation,. Protection and Restoration of the Environment Corfu, Greece: University of Ioannina Greece and Stevens Institute of Technology New Jersey
- Featherstone, R.E and Nalluri, C. 1982 . Civil Engineering Hydraulics. Essential Theory with Worked Examples .ELBS. 1<sup>st</sup> Edition. Granada Publishing, Billing and Sons Limited, Worcester
- France, P.W. 1993. Explicit friction factor relationships for the analysis of flow in pipe networks. Integrated Computer applications in water supply Volume 1 .Edited by Coulbeck Published by Research Studies Press Ltd. 1: 4-9
- Haaland, S.E. 1983. Simple and explicit formulas for the friction factor in turbulent pipe flow. *J Fluids Eng*. 105- 107.
- Jain, A.K. 1976. Accurate explicit equations for friction factor. *J Hydraulic Div, ASCE* 102(5):674–677.
- Lindell, E. O. 2006.The History of Water Distribution Network Analysis: The Computer Age. 8th Annual Water Distribution Systems Analysis Symposium, Cincinnati, Ohio, USA, August 27-30, 2006
- Mahendra, P. V. 2008. Moody Chart: An Activex Component To Calculate Frictional Factor For Fluid Flow In Pipelines. Proceedings, Thirty-Third Workshop on Geothermal Reservoir Engineering Stanford University, Stanford, California, January 28-30, 2008 SGP-TR-185
- Manadilli, G. 1997. Replace implicit equations with signomial functions. *Chem Eng* 104(8):129 - 135.
- McKeon, B. J., Zagarola, M. V. and Smits, A. J. 2005. A new friction factor relationship for fully developed pipe flow. *J. Fluid Mech.* 538: 429–443
- McKeon, B. J.; Swanson, C. J. ,Zagarola, M. V. Donnelly, R. J. And Smits, A. J. 2004. Friction factors for smooth pipe flow. *J. Fluid Mech.* 511: 41–44.
- Mehrani, Y. and Ayub, B. 2011. Estimation of Friction Factor in Pipe Flow Using Artificial Neural Networks. *Canadian Journal on Automation, Control & Intelligent Systems* 2(4): 52-56
- Moody, L.F.1944. Friction factors for pipe flow. *Trans ASME* 66:671–684.
- Moody, L.F.1947. An approximate formula for pipe friction factors. *Trans ASME*

- 69:1005–1006.
- Oke, I. A. 2007. Reliability and Statistical Assessment of Methods For Pipe Network Analysis. *Environmental Engineering and Sciences* 24(10): 1481-1489
- Özger, M and Yıldırım, G. 2009a. Neuro-fuzzy approach in estimating Hazen–Williams friction coefficient for small-diameter polyethylene pipes. *Advances in Engineering Software* 40: 593–599
- Özger, M and Yıldırım, G.. 2009b.. Determining turbulent flow friction coefficient using adaptive neuro-fuzzy computing technique. *Advances in Engineering Software* 40: 281–287
- Papaevangelou, G., Evangelides, C. and Tzimopoulos, C. 2010. A new explicit equation for the friction coefficient in the Darcy-Weisbach equation, Proceedings of the Tenth Conference on Protection and Restoration of the Environment: PRE10, July 6-9, 2010. Greece Corfu 166: 1-7.
- Prandtl, L. and Nikurdse, L.1952. Essentials of fluid dynamics. New York: Hafner 50:149-154.
- Romeo, E.; Royo, C. and Monzon A. 2002. Improved explicit equations for estimation of the friction factor in rough and smooth pipes. *Chem Eng J.* 86(3):369–374.
- Romeo, E.; Royo, C. and Monzon, A. 2002. Improved explicit equation for estimation of the friction factor in rough and smooth pipes. *Chemical Engineering Journal* 86 (3): 369-374.
- Round, G. F. 1980 . An explicit approximation for the friction-factor Reynolds number relation for rough and smooth pipes. *Can J Chem Eng.* 58(1):122- 126.
- Salmasi, F.; Khatibi, R. and Ghorbani, A. M. 2012. A study of friction factor formulation in pipes using artificial intelligence techniques and explicit equations. *Turkish J. Eng. Env. Sci.* 36: 121 – 138.
- Samadianfard, S. 2012. Gene expression programming analysis of implicit Colebrook-White equation in turbulent flow friction factor calculation. *Journal of Petroleum Science and Engineering* 92-93, 48-55.
- Serghides, T. K. 1984. Estimate friction factor accurately. *Chem Eng.* 91:63–64.
- Sonnad, J. R. and Goudar, C. T. 2004. Constraints for using Lambert W function-based explicit Colebrook–White equation. *J. Hydraul Eng, ASCE* 130(9):929–931.
- Sonnad, J. R. and Goudar, C. T. 2006. Turbulent flow friction factor calculation using a mathematically exact alternative to the Colebrook-White equation. *J. Hydraul Eng, ASCE* 132(8):863–867.
- Swamee, P. K. and Jain, A. K. 1976. Explicit equations for pipe-flow problems, *Journal of the Hydraulics Division, ASCE* 102, HY5, 657-664
- Tsal, R. J. 1989 . Altshul-Tsal friction factor equation, Heating, Piping and Air Conditioning. *ASCE* 102: 657-664.
- Vatankhah, A. R. and Kouchakzadeh, S. 2008. Discussion of "Turbulent flow friction factor calculation using a mathematically exact alternative to the Colebrook-White equation" by Jagadeesh R. Sonnad and Chetan T. Goudar. *J. Hydraul. Eng. ASCE* 134 (8):1187 - 1194
- Wikipedia, 2014. Darcy friction factor formulae. [http://en.wikipedia.org/wiki/Darcy\\_friction\\_factor\\_formulae](http://en.wikipedia.org/wiki/Darcy_friction_factor_formulae). Assess on 5/7/2014 3:32 PM
- Winning, H.K. and Coole, T. 2013. Explicit Friction Factor Accuracy and Computational Efficiency for Turbulent Flow in Pipes Flow, *Turbulence and Combustion* 90(1):1-27
- Wood, D.J. 1966. An explicit friction factor relationship. *Civil Eng, ASCE* 1966: 60 - 65.
- Xiande, F.; Yu X. and Zhanru, Z. 2011. New correlations of single-phase friction factor for turbulent pipe flow and evaluation of existing single-phase friction factor correlations. *Nuclear Engineering and Design* 241: 897–902
- Yıldırım, G. 2009. Computer-based analysis of explicit approximations to the implicit Colebrook-White equation in turbulent flow friction factor calculation. *Advances in Engineering Software* 40: 1183-1190
- Zigrang, D. J. and Sylvester, N. D. 1982. Explicit approximations to the solution of Colebrook's friction factor equation. *AICheJ.* 28:514-515