Estimated Annual Discharge Rates of Heavy Metals from Industrial Sources around Lagos; a West African Coastal Metropolis

E. O. Oyewo^{1*} and K. N. Don-Pedro²

¹Nigerian Institute for Oceanography and Marine Research, Victoria Island, P.M.B. 12729, Lagos, Nigeria (E-mail: oyewo2000@yahoo.co.uk, niomr@linkserve.com.ng); ²Ecotoxicology Laboratory, Department of Zoology, Marine Biology and Fisheries, University of Lagos, Lagos, Nigeria *Corresponding author

Abstract

A survey to determine the physico-chemical characteristics and heavy metal content of industrial effluents collected from different categories of industries around the Lagos metropolis, Nigeria, was carried out over a 12—month period. The annual discharge rates of the identified heavy metal species were estimated using results of the chemical measurements and other relevant information. The most prominent heavy metals occurring at the first four highest concentrations in the sampled effluents were Fe (1.82–4.4 mg l⁻¹), Mn (0.099–0.295 mg l⁻¹), Cu (0.011–0.27 mg l⁻¹) and Co (0.156–0.49 mg l⁻¹). Mercury, occurring at 0.004 mg l⁻¹, was only detected in effluents of the chemical and allied category of industries. Using appropriate relationships and information, and taking all investigated categories of industries into account, a total of 161,717.9 kg of Fe was discharged into the environment around metropolitan Lagos, followed by Cu (22,341.4 kg), Mn (20,589.6 kg), Co (15,682.6 kg), Cr (5,285.1 kg), Pb (2,258.6 kg), Zn (702.2 kg), Ni (613.7 kg), Cd (537.8 kg) and Hg (277.8 kg) in descending order of total discharge per annum. The importance of such data in environmental management is discussed while stressing the need to combine such information with results from bio-monitoring studies to avoid misleading conclusions.

Introduction

Industrialization remains an extant need to meet the increasing demands of the world's teeming millions for more food, energy, goods and services. However, pollution inevitably arises therefrom. Although the economic benefits of industrialization are incontestable, there is the need to make industrialization compatible with a reasonably healthy environment in which contaminant levels are minimized. Consequently, there has been a number of studies aimed at understanding relevant characteristics of the environment and man-made inputs as benchmarks for judicious management (Flos et al., 1987; Clements et al., 1990; Ayodele et al., 1991; Chen et al., 1991; Bryan &

Langston, 1992; Ortego & Benson, 1992). The focus of most of these studies is usually the determination of ambient concentrations of critical contaminants and pollutants and, sometimes, aspects of their biological effects but in most cases without attempts at quantifications of the magnitude and rate of mobilization. Yet, for proper environmental management, it is also useful to know the rate of discharge of these contaminants or pollutants into the environment.

In this regard, studies such as the one reported in this work should provide useful information on rates of mobilization of heavy metals into the environment and also serve as useful inputs into the global quantitative inventory of land—based sources of pollution

by heavy metals and other classes of pollutants. In addition, information from such quantitative studies will permit the identification and ranking of these species in terms of potential ecological accumulation and other effects. Furthermore, coupling of information from such studies with those from studies on biological effects will, among others, facilitate the formulation or modification of more appropriate and effective guidelines, limitation standards and other environmental management measures within a sustainable framework.

Lagos is a major metropolitan centre along the West African coast. With a population of about 12 million, it is the most populous coastal metropolis in the Gulf of Guinea. In

addition, over 60% of all industries in Nigeria are situated in the Lagos metropolitan area (FMHE, 1983; Portman et al., 1989; Oyewo, 1998). In a study on industrial database for Lagos State in Nigeria, WES (1997) enumerated more than 2,000 industrial establishments around Lagos metropolis. Effluents from these industries are discharged into the various compartments of the environment along with their loads of heavy metals and other pollutants.

Materials and methods

In a chemical survey of industrial effluents as sources of critical pollutants, FMHE (1983) identified four industrial areas in the Lagos Metropolis. To update this information, two more were added in this study making a total of six. Nine industrial effluent points (comprising at least one from each of these areas) were sampled (Table

1). Effluents were collected every other month from all nine discharge points for 12 months between March 1989 and March 1990.

On each sampling day and at each sampling point, morning (8.0–9.30 a.m. and afternoon 12.00–2.00 p.m.) samples were collected to reflect a more representative effluent composition. At the point of collection, the appearance, dissolved oxygen (DO), temperature, pH and discharge rates were measured using visual appraisal, Winkler's method, electronic thermometer, pH meter and 'flow timing', respectively. The samples were kept in pre-cleaned, screw—cap containers (2 1 capacity) and taken to the laboratory for storage in a refrigerator. To prevent adsorption, the

Table 1

Locations of different discharge points from which effluents were sampled

Sampling point location	Zone	Type of industry
Adeniyi Jones Aromire street junction	Ikeja	+ Chemical and allied
Ashade market precinct	Ikeja	Chemical and allied
Akinola close discharge point, Onigbongbo	Ikeja	Chemical and allied
Eric-Moore road discharge point	Iganmu	Textile
Anthony Village Flyover/Oshodi expressway junction	Icupeju	Textile
Oshodi express way collection point 1	Isolo	Textile
Oshodi express way collection point II	Isolo	Textile
Oregun road/Lagos Ibadan express road	Oregun	Food and beverages
Lagos Harbour collection point	Apapa	Soaps, detergents and cosmetics

⁺ Chemical and allied grouping includes chemical plants, metal products, plant manufacturing, plastic plants, pharmaceuticals, printing presses and rubber products.

samples were acidified to pH < 2 (APHA, AWWA, WPCF, 1980). Subsequently, the composite effluent samples were properly mixed and digested with nitric acid following standard procedures (APHA, APWA, WPCF, 1980). Instrumental analysis was done by comparing sample absorbances when aspirated into flame, with those of factory-prepared AAS standard solutions using an Alpha-4 Cathodeon Atomic Absorption Spectrophotometer for all the metals except Hg, for which the Cold Vapour Accessory of the same equipment was used. For data quality assurance, particular attention was paid to the cleanliness of all wares. In addition, factory-prepared AAS standard solutions were run as samples at pre-determined intervals to check accuracy and precision.

In order to estimate the annual rate of discharge of heavy metals via industrial effluents at their points of discharge around Lagos, the following parameters were investigated: mean concentration of heavy metal species in industrial effluent samples, rate of effluent discharge per unit time at sampling points, approximate number of hours of effluent flow per day of production and number of days of industrial production accompanied by effluent discharge per year. The entire investigation was facilitated by a combination of the foregoing chemical measurements, visual observations of colour and appearance as well as interviews with factory workers and citizens working or living near the investigated industries, and/ or their effluent discharge points for information on number of working hours per day and number of working days per year which, in this particular study, are 15 and 300, respectively. For the purpose of this study, the investigated industries were

grouped into four on the basis of their products.

Employing the foregoing parameters, the following relationship (Oyewo, 1998) was used to give the required estimate:

EADR (kg) =
$$\frac{\text{NWHD} \times \text{NWDY} \times \text{C} \times \text{D} (3,600)}{1,000,000}$$
(1 h = 3,600 secs); (1 kg = 1,000,000 mg)

On reduction to lower terms, this relationship can also be written as:

EADR (kg) =
$$\frac{\text{NWHD} \times \text{NWDY} \times \text{C} \times \text{D} \times 9}{2,500}$$

where EADR = Estimated annual discharge rate; NWHD = Number of working hours per day; NWDY = Number of working days per year; C = Average concentration of heavy metals in mg l⁻¹ in effluent sample; D = Rate of effluent discharge (L sec -1)

Results

Physico-chemical characteristics of sampled industrial effluents

Observations of effluents at the points of entry into drainages or other water bodies revealed that at different times, they were of various colours ranging from brown to green to yellow. There were also differences in the measured physico-chemical characteristics. The temperature ranged between 27 and 48 °C, pH values were in the range 6.9-10.7 while the dissolved oxygen (DO) ranged between 2.79 and 4.97 mg 1⁻¹ (Table 2).

Presence and concentrations of heavy metals in industrial effluents

All the industrial effluents sampled contained different types of heavy metals occurring in varying concentrations (Fig. 1, Table 3).

On the basis of proportion of occurrence

Table 2

Physico-chemical characteristics and discharge rates of effluents at their discharge points

Types of industires	Discharge points	Appearance	pH mean ±SE	Temperature (°C) mean ±SE	Dissolved oxygen mg l ⁻¹ mean ±SE	Discharge rate l sec¹ mean ±SE
Chemical and allied	Adeniyijones/ Aromire Street Junction, Ikeja	Turbid and varicoloured	9.5±0.48	29.07±091	4.19±0.26	9.1±2.32
Chemical and allied	Ashade Market Area, Ikeja	Varicoloured	7.3±0.17	28.89±0.65	4.80±0.25	5.26±1.72
Chemical and allied	Akinola Close, Onigbongbo, Ikeja	Varicoloured	7.5± 0.14	48.33±1.81	3.54± 0.32	10.13±1.80
Textile	Eric-Moore Road, Iganmu	Turbid and varicoloured	10.7±0.94	30.90±0.79	2.79±0.21	2.5±0.45
Textile	Anthony Village Flyover/Oshodi Express Junction, Ilupeju	Varicoloured	6.9±0.11	28.37±0.71	3.31±0.33	2.13±0.32
Textile	Oshodi Expressway collection point 1, Isolo	Varicoloured	7.5 + 0.45	27.70 + 0.66	3.43 + 0.20	0.58 + 0.08
Textile	Oshodi Expressway collection point II, Isolo	Varicoloured	8.3±0.38	39.76±1.14	3.03±0.20	1.39±0.08
Food and beverages	Oregun Road Lagos-Ibadan Expressway, Oregun	Slightly turbid and varicoloured	7.6±0.22	27.9±71.14	4.86±0.37	2.34±0.24
Soaps, detergents and cosmetics	Lagos Harbour collection point, Apapa	Varicoloured	8.5±0.33	27.73±0.74	4.97± 0.34	1.91±0.17

of heavy metals analysed, the constituents of the effluents were shown to vary within industries that produced similar products and between those that produced different products (chemical and allied, textile, food and beverages, soaps and detergents) (Fig. 1, Table 3). The mean concentration of heavy metals within each group/type of industrial effluents sampled showed that with the chemical and allied industries, the concentration of Fe was the highest (1.85 mg l⁻¹) followed by Cu, Mn, Co, Zn, Cd, Pb, Ni, Cr and Hg (0.004 mg l⁻¹) in a descending order (Table 4). With the textile industries,

Fe was again the heavy metal that occurred at the highest concentration (1.82 mg l⁻¹) followed by Co, Zn, Mn, Cu, Cd, Pb, Cr and Ni (0.001 mg l⁻¹) in descending order, whereas Hg was not detected (Table 3). In the food and beverages industries, Fe and Cr occurred at the highest and lowest concentrations, respectively (Table 3). Typical AAS instrumental detection limits are presented in Table 3a.

Taking all categories of industries together, the highest concentration of Fe was recorded in the food and beverages industries followed by soaps and detergents, chemical and allied,

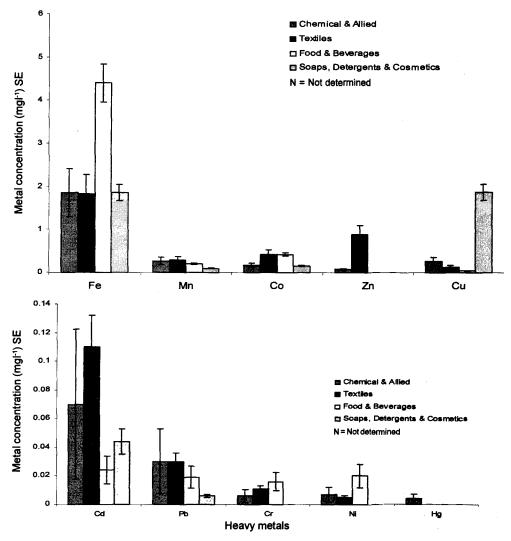


Fig. 1. Mean concentrations of heavy metals (mg l¹) ±SE measured in effluents collected fron categories of industries

and textile in descending order (Table 3). Mercury was only detected in effluents from the chemical and allied industries. The most prominent heavy metals occurring at the first four highest concentrations in the various industrial effluents were Fe, Mn, Cu and Co (Fig. 1, Table 3).

Estimation of the amount of heavy metals discharged into the environment with industrial effluents around Lagos metropolis

Based on the relationship described earlier, the amount of heavy metals introduced into the environment annually per single industry varied between 215.18 kg of Fe and 0.47 kg of Hg for the chemical

Table 3a

Mean concentrations of heavy metals in effluents from different categories of industries

Type of industries	Mean heavy metal concentration (mg l^{-1}) \pm SE										
-	Fe	Cu	Ni	Cd	Mn	Pb	Cr	Zn	Hg	Co	
Chemical	1.85	0.27	0.007	0.07	0.269	0.03	0.006	0.073	0.004	0.17	
and allied	±0.61	±0.092	±0.002	±0.046	±0.61	±0.03	±0.002	±0.015	±0.002	±0.048	
Textile	1.82	0.13	0.005	0.11	0.295	0 0.03	0.011	0.88	nd	0.49	
	±0.28	±0.026	±0.002	±0.032	±0.046	±0.006	±0.004	±0.07		±0.055	
Food and	4.4	0.039	0.02	0.024	0.203	0.019	0.016	ND	nd	0.423	
beverages	±0.377	±0.011	±0.008	±0.011	±0.019	±0.008	±0.008			±0.042	
Soaps, detergent and	1.86	1.87	nd	0.044	0.099	0.006	nd	ND	nd	0.156	
cosmetics	0.072	±0.026		±0.008	±0.019	±0.004				±0.011	

nd = Not detected ND = Not determined

TABLE 3b

Typical AAS instrumental detection limits (DL)*

Metal Fe	F	lame	Furnac	e Vapour
	0.06	mg l-1	1.5 pg	-
Cu	0.04	mg l ⁻¹	1.8 pg	-
Ni	0.063	mg l-1	3.6 pg	-
Cd	0.034	mg l ⁻¹	0.98 pg	-
Mn	0.029	mg l-1	0.57 pg	-
Pb	0.10	mg l-1	1.50 pg	-
Cr	0.05	mg 1 ⁻¹	0.72 pg	-
Zn	0.013	mg l-1	0.22 pg	-
Hg	-		-	1.2 μg l ⁻¹
Co	0.081	mg l-1	2.5 pg	-

^{*} Source: Pye Unicam 969 AAS Cookbook

and allied industries, 48.65 kg of Fe and 0.13 kg of Ni for the textile industries, 166.80 kg of Fe and 0.6 kg of Cr for the food and beverages industries, and 57.86 kg of Cu and 0.19 kg of Pb for the soaps and detergents industries (Table 4). When these estimated amounts of discharged heavy metals per unit industry were multiplied by an estimated number of industries within each category (after MAN, 1989, World Environment Systems, 1997), the total amount of each

metal that was discharged by each group of industries per annum are given in Table 5. Out of all the heavy metals detected in the various effluents, the amount of Fe discharged per annum was the highest in all categories of industries, with the greatest amount discharged from 591 chemical and allied industries (127171.4 kg) followed by the estimated 56 food and beverages industries (27188.4 kg), 85 textile industries (4135.3 kg) and 56 soaps, detergent and cosmetic industries (3222.8 kg) (Table 5). Other prominent heavy metals discharged along with industrial effluents included Cu, Mn, Co, Zn, Cd and Pb in descending order in terms of amounts while Ni, Cr and Hg occurred in relatively small quantities.

Overall, the estimates showed that a total of 161,717.9 kg of Fe was discharged into the environment in metropolitan Lagos by all investigated categories of industries in this study followed by Cu (22,341.4 kg), Mn (20,589.6 kg), Co (15,682.6 kg) and Zn (7,026.2 kg)—estimate from only two categories of industries and not four (Tables 5 and 6); Cr (5285.1 kg), Ni (613.7 kg), Cd (537.8 kg) and Hg (277.8 kg) in descending order of total discharge per annum.

TABLE 4

Estimated annual discharge rates (EADR) of heavy metals per industry at the effluent discharge points of different categories of industries

Industry category	Heavy metal sampled (kg)									
	Fe	Cu	Ni	Cd	Mn	$P\bar{b}$	Cr	Zn	Hg	Co
Chemical and allied	215.18	31.41	0.81	8.14	31.29	3.49	0.70	8.49	0.47	19.77
Textile	48.65	3.49	0.13	2.94	7.89	0.80	0.29	23.63	0.00	13.10
Food and beverages	166.80	1.48	0.76	0.91	7.70	0.72	0.61	ND	0.00	16.04
Soaps, detergents and cosmetics	57.55	57.86	0.00	1.36	3.06	0.19	0.00	ND	0.00	4.83

ND = Not determined

Table 5

Estimated amount of annual discharge of heavy metals from different categories of industries⁺ in Lagos metropolis

Industrial category	Heavy metal (kg)									
	Fe	Си	Ni	Cd	Mn	Pb	Cri	Zn	Hg	Со
Chemical and allied 1	127171.4	18,563.3	478.7	4810.7	18,492.4	2062.6	413.7	5017.6	277.8	11,684.1
Textile 2	4135.3	296.7	11.1	249.9	670.7	68.0	24.7	2008.6	0.00	1113.5
Food and beverages 3	27188.4	241.2	123.9	148.3	1255.1	117.4	99.4	-	0.00	2614.5
Soaps, detergents and cosmetics 4	3222.8	3240.2	0.00	76.2	171.4	10.6	0.00	<u>-</u>	0.00	270.5
Total	161717.9	22341.4	613.7	5285.1	20589.6	2258.6	537.8	7026.2	277.8	15682.6

1:591

2: 85

3&4 : 56

Discussion

Using the empirical relationship mentioned earlier, it was estimated that a total of 161,717.9 kg of Fe, 22,341.4 kg of Cu, 20,589.6 kg of Mn, 15,682.6 kg of Co and 7,026.2 kg of Zn were discharged from industrial sources alone into the environment annually. Although no similar estimates based on empirical measurements and observations are available for the study area, these figures are likely to be particularly realistic because the underlying assumptions

were based on observations and interviews with relevant persons and agencies, and relevant studies were carried out over a 12-month period. The results of such interviews were the basis for knowing the number of working hours per day and the number of days in a year accompanied by production. Additionally, the estimated number of industries should be very close to reality since it included even small—scale enterprises as well.

⁺ Based on all industries Estimated number of industries after MAN, 1989 and World Environmental Systems, 1997

Given the fact that the discharges are continual, the estimates offer possible explanation to the effect that the concentration of some heavy metals in the Lagos lagoon (the ultimate recipient of the loads of the discharges) sediments and water have already exceeded their toxicity thresholds against sensitive species like Mugil sp., T. guineensis and Cypris sp., established in laboratory bioassays in a related study (Oyewo, 1998). Furthermore, comparison with a similar study carried out in India shows that the estimated discharge rates of Cr in this study was higher whereas the estimated discharge rates of Zn, Cu, Hg and Pb were lower in each case when compared to the rates of discharge of the respective metals into the Ulhas and Kalu-Waldhuni tributaries around Bombay (Patel et al., 1985).

It is noteworthy that the distribution of pHand DO in the entire lagoon system are generally uniform in time and space irrespective of effluent reception status (Oyewo, 1998). Thus, in spite of the known effects of these parameters on speciation, availability and toxicity of heavy metals, the pH and DO status of the effluents do not seem to exert sufficient influence for any significant changes in these parameters in the Lagos lagoon environment. However, the amounts of heavy metals discharged into the environment as a result of industrial activities around Lagos metropolis will likely increase in the future as more industries are established.

The estimated rates of heavy metal discharge provide good experimental evidence to support the need for imposing stricter limitation standards for industrial effluents, and enforcement *via* regular monitoring to ensure compliance. It is,

however, pertinent to caution that the figures presented in this paper do not necessarily represent potential toxicity magnitudes. The information should thus be used along with data from bio-monitoring and other relevant investigations to avoid misleading conclusions. For example, whereas Cu has a higher discharge rate than Mn, the latter has a much higher toxicity threshold (Oyewo,1998) suggesting that it is less toxicologically significant. However, Fehas the highest discharge rate and the highest toxicity threshold of all the investigated metals in a related earlier study (Oyewo, 1998).

References

- APHA-AWWA-WPCF (1980). Standard methods for the examination of water and waste water, 15th ed. American Public Health Association.
- Ayodele J. T., Momoh R. U. and Aminu M. (1991). Determination of heavy metals in Sharada Industrial effluents. In Book of Abstracts: Second National Environmental Seminar, p. 14. FEPA, F.M.H., National Water Resources Institute, WHO, Kaduna State Water Board.
- Bryan G. W. and Langston W. J. (1992) Bioavailability, accumulation and effects of heavy metals in sediments with special reference to United Kingdom estuaries: a review. *Envir. Pollut.* 76: 86-131.
- Chen Y., Dai Q., Chen C., Jianming P. and Pai Y. (1991). The toxicity of Ag⁺ to fish and other aquatic animals. *J. Fish China Schuichan Xuebao* 15 (1): 55 61.
- Clements W. H., Cherry D. S. and Cains J (Jnr) (1990). Macro-invertebrate community response to copper in laboratory and field experimental streams. *Arch. Envir. Contam. Toxicol.* 19 (3): 361–365.
- Flos R., Tort L and Balassch J. (1987). Effects of zinc sulphate on haematological parameter's in the dogfish Scyliorhinus canicula and influence of MS 222. Mar. Envir.

- Res. 21:289-298.
- FMHE (1983). Industrial Waste Management, Monograph Series 1. Greengate Ltd/Federal Ministry of Housing and Environment, Lagos, Nigeria.
- MAN (1989). *Industrial Directory of Nigeria*. Manufacturer's Association of Nigeria.
- Ortego L. S. and Benson W. H. (1992). Effects of dissolved humic material on the toxicity of selected pyrethroid insecticides. *Envir. Toxicol. Chem.* 11 (2): 261-265.
- Oyewo E. O. (1998). Industrial Sources and Distribution of Heavy Metals in Lagos Lagoon and their Biological Effects on Estuarine Animals. (PhD Thesis.) University of Lagos,

- Nigeria. 279 pp.
- Patel B., Bangera V. S., Patel S. and Balani M. C. (1985). Heavy Metals in Bombay Harbour Area. *Mar. Pollut. Bull.* 17 (8): 383–385.
- Portman J. E., Biney C., Ibe A. C. and Zabi S. (1989). State of the marine environment in the West and Central African region. *UNEP Regional Seas Reports and Studies* No. 108. UNEP.
- World Environmental Systems (WES) (1997). Industrial Data Base and Map of Lagos State. Special report for the Lagos State Ministry of Environment and Physical Planning, Alausa – Ikeja. 85 pp.

INSTRUCTIONS TO AUTHORS

Papers for submission to the West African Journal of Applied Ecology should be written in English and should not exceed 8,000 words in total length. Papers should not have been submitted or be considered for submission for publication elsewhere. Ideas expressed in papers that are published in the Journal are entirely those of the authors and not those of the Editors. Papers submitted will be subjected to peer review before possible publication. Authors are encouraged to suggest names of two potential referees. They should, however, not be from the same Institute, nor should they have been at any time closely associated professionally with the author(s) of the paper being submitted. The Editorial Board regards these names as suggestions only, and is not obliged to use any or both of the proposed names.

Papers for publication should be submitted to: The Editor West African Journal of Applied Ecology Ecological Laboratory Unit University of Ghana P. O. Box LG59 Legon, Accra Ghana.

Reprints

Authors will receive one copy of the Journal in which their papers are published. Author(s) may order reprints at their own cost. Proofs come to the authors with reprints order forms.

Copyright

Authors publish in the Journal with the understanding that they assign their copyright to the West Africa Journal of Applied Ecology.

Organization of Manuscripts

Authors should please submit three copies of their manuscript, typed with double spacing, including figure legends, table footnotes and references, on one side of A4 (30 cm × 21 cm) size high quality paper, with 2.5 cm margins on all four sides. Papers must be numbered sequentially, including the abstract, figure legends and tables. The paper should be organised into the following sections:

- Title page, indicating title, short running title, name of each author, and, for each author, position held and full address. Please indicate which address should be used for correspondence and reprints requests where there is more than one author.
- Abstract, not exceeding 300 words. Should provide a brief summary of the basic content of the paper, including major methods used, results and deductions or conclusions. Avoid abbreviations and do not include tables and diagrams, and, unless absolutely necessary, references should be excluded.

- Introduction, to supply background information and references of earlier published reports related to the study, and provide the rationale for undertaking the study. Should avoid excessive references, particularly those not closely related to the study.
- Materials and methods, to provide sufficient technical information on approaches, materials and equipment, etc., used to obtain the results reported, such that the work could be duplicated by someone else.
- Results, reporting only the results of the experiments, illustrated by Tables and Figures.
- **Discussion**, an interpretation of the results, and its relation to other previously published work on the subject, and must not be a recapitulation of results.
- Acknowledgements, indicating the source of any financial support or personal assistance received in carrying out the study.
- References, listing all quoted published material, arranged in alphabetical order, typed double-space. Abbreviate journal names according to BIOSIS Serial Sources (Bio-Sciences Information Service, Philadelphia, Pa., 1997).

Follow the styles shown in the examples below:

- Bhuvaneswari, T. V. and Selheim, B. (1985). Root hair deformation in the white clover/ Rhizobium trifolii, symbiosis. Physiol. Plant. 63: 25-34.
- Deutscher, M. P. (1990). Guide to Protein Purification. Acad Press Inc., San Diego, USA. Dreyfs, B., Garcia, J. L. and Gillis, M. (1988). Characterization of *Azorhizobium caulinodans* gen. Nov., sp. Nov., a stem-nodulating nitrogen-fixing bacterium isolated from *Sesbania rostrata*. *Int. J. Syst. Bacteriol.* 38: 89-98.
- Van Rhee, J. E. (1963). Earthworm activities and the breakdown of organic matter. In Soil Organisms. Eds. J. Doeksen and J. van der Drift. Pp. 55-59. North Holland, Amsterdam.
- Sambrook, J., Fritsch, E. F. and Maniatis, T. (1989). Molecular Cloning: a laboratory Manual. Cold Spring Harbor Laboratory, Cold Spring Harbor, New York, USA.
- References in the text should be quoted by the author's name and date in parenthesis and presented in date order. Where there are more than two authors, the first author only should be quoted, followed by *et al.* and date in parenthesis.
- Illustrations and Tables, should be of high quality, and line drawing. Should be in a form suitable for reproduction without modification. Figures, photographs and tables should be added separately, i.e. not inserted in the typed text, with each figure or table presented on a separate page, and designed for linear reduction in the ratio of 2:1 or 3:2, for printing within a column width of 6.5 cm or a double-column width of 13.6 cm. Lettering on axes and within figures should be clear and big enough to be legible even upon 50-75% reduction in size. The figure legends should be typed, correspondingly, on a separate page, headed Legends at the end of the article. The author's name, the figure number and indication of its proper orientation should be written lightly on the back of each figure. Photographs should be supplied as black-and-white high, contrast glossy prints. Colour plates may be inserted only if author agrees to pay for the expenses

involved.

Units

All measures should be indicated in SI units. Where necessary they may be followed by the equivalent intraditional units in parenthesis.

Change of Address

Authors should promptly notify the Editor of any change of address.

Reviews of Books

Books and monographs will be reviewed by invited reviewers. They may be sent to the Editor.

Other Notes to authors

- Copyright material. Authors have the responsibility of ensuring that co-authors are in agreement with the form and submission of the manuscript, and for obtaining permission to quote material from copyright sources.
- Returning of manuscripts to authors. Manuscripts submitted will not be returned to authors unless specifically requested at the time of submission.
- Proofs will be sent to authors for final correction. However, authors are not expected
 to make extensive modifications of manuscripts at this stage, otherwise they would be
 surcharged. Proofs sent to authors for correction should be returned within a week of
 receipt, together with any order for reprints.
- Acceptance of manuscripts for publication. Acceptance of a manuscript for publication will be indicated explicitly in a letter to the authors, and whether any corrections or modifications are required to be made on the paper or not. Similarly, authors whose papers are rejected for publication will be notified.